

UNIVERSAL[®]

CHILLING SYSTEMS

UCS-20AR3-B AIR COOLED

PHYSICAL DATA

Cooling Capacity	kcal/h		60400
	BTU/h		240000
	Nominal Capacity	RT	20
	Outlet Water Temp.	°F	50
	Condensation Temp.	°F	122
Power Supply			3PH-220V-60HZ
Max Amp		A	109
Total Power Input		HP	37
Power Supply Cable Diameter		mm ²	AWG 3
Safety Protection Device			Overload, Inverse Phase, High/Low Pressure, Water Flow, Water Level & Anti-Freeze Protection
Refrigerant	Type		R454B
	Charge	Lbs	8.8 (each)
Compressor	Start Mode		Direct start
	Type		Scroll Type
	Qty		2
	HP		15x2
	RLA (Rated Load Amp)		45.7x2
	LRA(Locked Rotor Amp)		304x2
Fan	Qty		2
	Type		External Rotar Axial Fan
	Power	HP	1.5x2
	Current	A	3.6x2
	LRA	A	22x2
	Volume Air Flow	CFM	14706
Condenser	Type		MCHE
	Subcooling	°F	9
	Heat Rejection	BTU/h	316269
Evaporator	Type		SS304 Shell and Tubes
	Superheat	°F	9
	Heat Rejection	BTU/h	240,034
	Cooled Water Flow	GPM	55
	Water Pressure Drop	PSI	≤12
Energy Adjust Mode			100%-50%-0%
Throttling Device	Mode		thermal expansion valve
Pipe	Water Outlet		MNPT 2"
	Water Inlet		MNPT 2"


UNIVERSAL[®]

CHILLING SYSTEMS

Water Pump	Flow	GPM	55
	Head	PSI	62.0
	LRA	A	64.2
	Power	HP	4.00
Water Tank	Capacity	GAL	53
Sound Pressure at 1 meter	DBA		74
Programming Controller	Display		LCD display
	Controller		microcomputer controller
	Temp Control Range °F		+41 ~+95
	Temp Control Accuracy°F		±3.6
Dimensions	inches (LxWxH)		88x39x87
Weight	lbs		1147(For Reference)

NOTES:

- 1 Cooling capacity based on 5°C(41°F) leaving coolant and 35°C(95°F) ambient air.
Chilled water work allowed temperature range: 5°C~35°C (41°F ~95°F).
- 2 Chilled water in and out temperature difference: 3°C~8°C (5.4°F~14.4°F);
Allowed ambient temperature range: -20°C~40°C (-4°F~104°F).
- 3 Power supply: 3PH-220V-60HZ , Allowing the voltage fluctuate ±10%, allow phase voltage difference ±2%, Allow the frequency range ±0.2Hz.

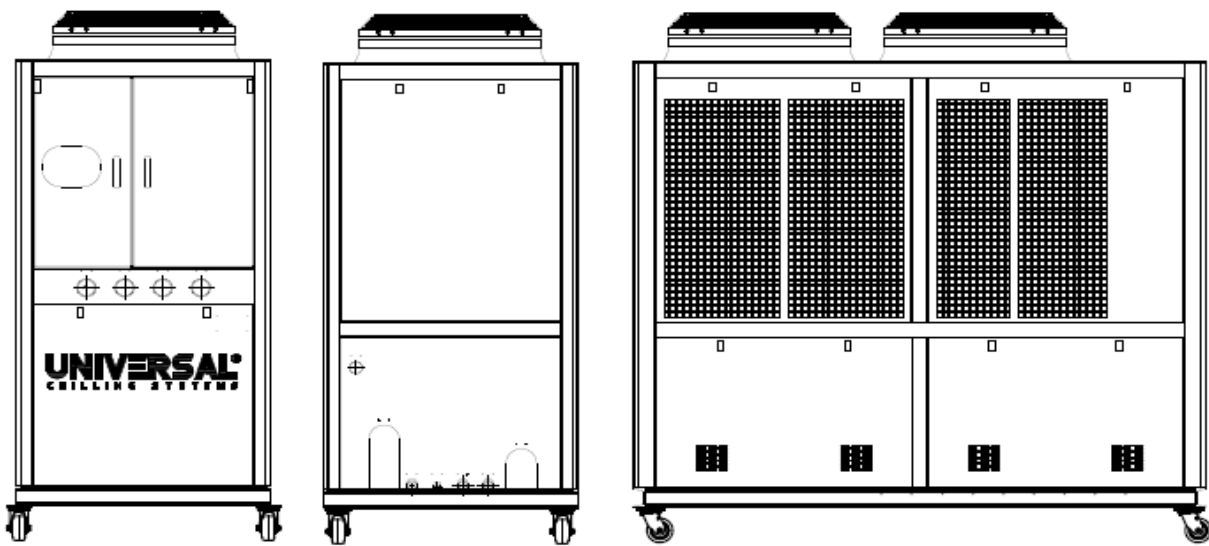

UNIVERSAL[®]

CHILLING SYSTEMS

